



32-32, Jungahn-Nonggongdangigil, Jungahnmyun
Chungcheongnam-do South Korea



TEL:82-41-850-9700 FAX:82-41-881-9701



ygnam@daesanhoist.com msjeong@daesanhoist.com



www.daesaninotec.com



www.facebook.com/daesaninotec



ISO 9001
ISO 14001



'Lift Your Confidence'



DAESAN[®]
'Lift your confidence'

DAESAN INOTEC

www.daesaninotec.com

- ELECTRIC CHAIN HOIST
- ELECTRIC TROLLEY
- CHAIN BLOCK
- LEVER HOIST
- TROLLEY
- WIRE ROPE WINCH





DAESAN HOIST



Contents

ABOUT DAESAN

INTRODUCTON	04
DAESAN HISTORY	06
DAESAN PUBLIC RELATIONS	07
SLOGAN AND PRODUCTION CAPACITY	08
CERTIFICATIONS	10

DAESAN PRODUCTS

ELECTRIC HOIST

SMART CHAIN HOIST - EDL,DL,EDLM,DLM	12
DUAL BRAKE HOIST(SINGLE SPEED & INVERTER CONTROL) - DSA,EDSA,DSM,EDSM	18
LOW HEADROOM HOIST - DSTHM,DSHM,EDSTHM,EDSHM	22
TWIN HOOK TYPE HOIST - DSDHA,DSDHM	23
FRICTION CLUTCH HOIST - DST,DSTM,DSS,DSSM	26
FRICTION CLUTCH INVERTER HOIST - EDST,EDSTM,EDSS,EDSSM	28

MANUAL HOIST

CHAIN BLOCK - DSN Series	30
LEVER HOIST - NDM,D1 Series	32
TROLLEY - Plain Trolley, Geared Trolley	35
SPARK PROOF TYPE - Chain hoist, Plain & Geared traveling trolley	36
WIRE ROPE WINCH	38

DAESAN

More than 3 decades of hoist manufacturing

DAESAN has been proven worldwide with our excellency in Electric Chain Hoist, Chain Block, Lever Hoist, Trolley and Wire Rope Winch.

Chemical plant, construction plant, ship-building yard and other industrial manufacturing plant in Korea as well as 40 other countries abroad are lifting and moving load with DAESAN products.

We provide service solutions to wherever safety weight load is required.



Just-In-Time Delivery, including parts maintenance

We supply all components just in time when you need them. Backed up by more than 35 years of experienced engineers and lifting equipment specialists pursuing its excellency, any unsatisfaction from customers shall be greeted with many thanks as a new chance for our improvements.

HISTORY

- 2000** ● **DEC** Established INOTEC CO. LTD
- 2001** ● **APR** Acquired CE mark
- 2003** ● **JUL** Designated as promising export company
- 2005** ● **DEC** Developed 1~5ton of electric chain hoist
- 2006** ● **JAN** Sign an exclusive export contract with USA company
- **FEB** Acquired electric chain hoist CE mark
- 2007** ● **FEB** Changed company name to Daesan Inotec Co., Ltd
- **JUN** Developed inverter hoist (filed a domestic patent)
- **SEP** Selected as partner company of Kolon 
- 2008** ● **DEC** Designated CLEAN WORKPLACE
Achieve \$ 3million in exports
- 2009** ● **MAY** ISO9001 (Quality Management System)
ISO14001 (Environmental Management System)
- **JUN** Acquired KCS mark (Industrial Safety Management Corporation)
- **AUG** Selected as partner company of Hanjin Heavy Industries Co., Ltd 
- 2010** ● **FEB** Registered a utility model for inverter electric hoist (Contactless interface for VFD hoist)
- 2011** ● **NOV** Moved the factory to Chung-nam Gongju (Jungahn 2nd Farm's Industrial Complex)
- **DEC** Acquired electric chain hoist(10ton) KCS mark (Industrial Safety Management Corporation)
- Selected as partner company of Lotte Engineering and Construction Co., Ltd 
- 2012** ● **JUL** Succeeded in SME technology development business (Compact chain hoist development)
- **SEP** Development of compact electric hoist 0.49ton to 2ton
- **OCT** Acquired compact electric chain hoist CE and KCS mark
- **DEC** Acquired electric chain hoist 7.5ton CE and KCS mark
- 2013** ● **MAY** Registered as a partner company of LS Industrial Systems (Cheongju) 
Registered a utility model for compact Hoist (Clutch type chain hoist with limit switch)
- **JUL** Acquire INO-BIZ from the small and medium business administration
- **OCT** Acquired low headroom type electric hoist 1~5ton KCS mark
- **NOV** Registered as a partner company of Lotte Chemical Co., Ltd 
- 2014** ● **MAR** Developed single phase hoist (0.49ton to 2ton)
Developed Inverter type single phase hoist (0.49ton to 2ton)
Acquired electric chain hoist KCS mark for 15ton & 20ton
Acquired Special Equipment License (China)
- **JUL** Succeeded in SME technology development project (Inverter chain hoist & single phase hoists applied Electric chain hoist)
- 2015** ● **JAN** Awarded a commendation by the small and medium business administration
Win a overseas contract for electric hoist (DSM-20ton) (KEPPEL Singapore)
- **FEB** Selected as IP star company by Chungnam Intellectual Property Center
- **JUN** Patent registration of single-phase hoist with 3-speed reduction gear
- **AUG** Hoist patent registration including regenerative braking resistance
- **DEC** Won the \$3million Export Tower
Achieved \$4million in exports
- 2016** ● **JAN** Registered a utility model for single-phase hoist with discharge resistance
- **MAR** Development and certification of manual explosion-proof hoist
- **MAY** Registered patent for electric chain hoist with limit switch
- 2017** ● **MAR** Developed Clean room hoist (export to USA)
- **AUG** Developed chain block with overload protection device (Supplied to Samsung Corporation)
- **OCT** Patent registration for hoist including inverter integrated board
Patent registration for hoist with wireless control system
- **NOV** Started production of twin hook type chain hoist
- 2018** ● **JAN** Started production of NDM lever hoist and acquired CE mark
- **JUL** Supplied hoist for a wind power plant, 4.2MW U136 (Hoist spec: 1Ton, DSAP-1S LIFT 100M)
- 2019** ● **APR** Selected as Global Giant Company in small & medium industry
- 2020** ● **FEB** Obtained UL certificate for electric chain hoist (the first ever Korean hoist manufacturer)
- **JUN** Started production on smart hoist, EDL/DL (125, 250, 500kg) (obtained CE, KCS)
- **AUG** U.S patent registration for stepless control function of smart electric chain hoist

DAESAN PUBLIC RELATIONS


Exhibitions

Since 2001 Daesan has been continuously participating in exhibitions every year in many locations around the world.



Video Manual

Daesan provided video manuals for our products so our customers can use their hoists safely and conveniently.

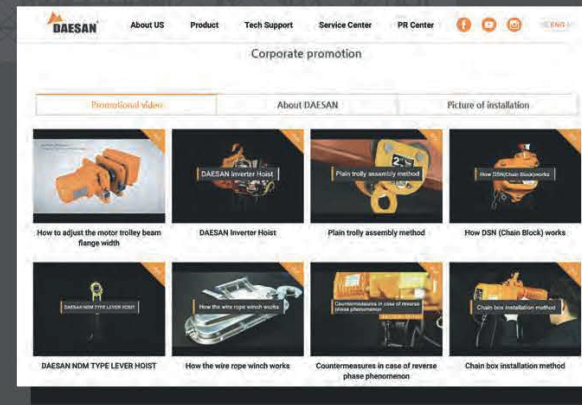

1. How to use video manuals on Daesan's homepage

Our video manuals along with much other useful information can be accessed through our homepage.

www.daesaninotec.com

2. Subscribe to Daesan's YouTube Channel

Subscribing to Daesan's YouTube Channel allows instant access to new video manuals.

enter "daesan inotec" into the search bar for www.youtube.com and click "subscribe"

Daesan Social Media

Check out our latest news through Daesan's many social media pages.

 [www.youtube.com / DAESANINOTEC](http://www.youtube.com/DAESANINOTEC)

 www.linkedin.com/in/daesaninotec

 [www.instagram.com / daesan_hoist](http://www.instagram.com/daesan_hoist)


 www.twitter.com/daesaninotec

 [www.facebook.com / daesaninotec](http://www.facebook.com/daesaninotec)

OUR SLOGAN




PRODUCTION CAPACITY

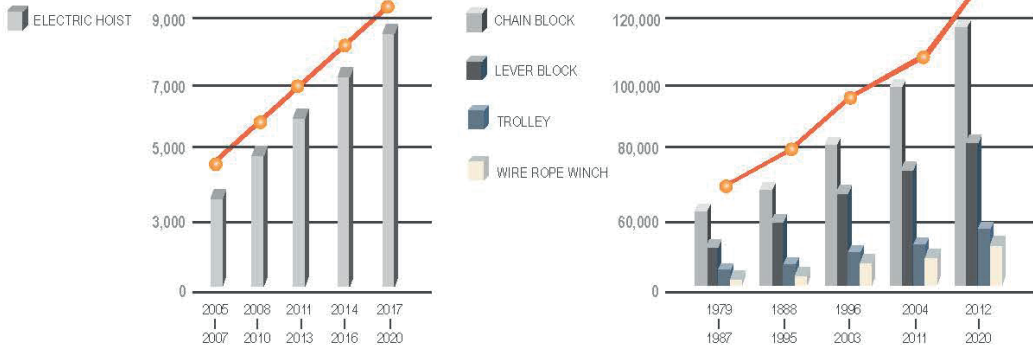


EXPORTING COUNTRIES

Chemical plant, construction plant ship-building yard and other industrial manufacturing plant in Korea as well as 40 other countries abroad are lifting and moving load with DAESAN products.

U.S.A., Canada, Columbia, Panama, Chile, Ecuador, Mongol, France, Qatar, U.A.E, Greece, Egypt, China, Philippines South Africa, Sri Lanka, Vietnam, Singapore, India, Jordan, Saudi Arabia ..etc.

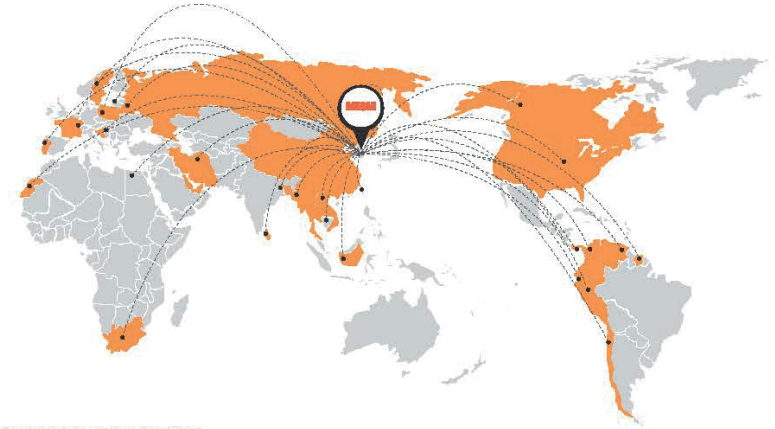

MANUFACTURING PROCESS

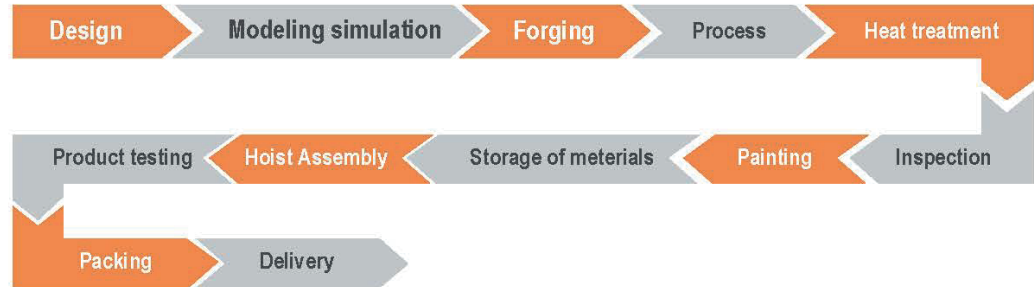

CERTIFICATIONS

• Company Certifications



Small Giant Company of Korea



Research Institute



INNO-BIZ




Promising Export Firm



Chines safety & Quality certification



Citation



PL insurance policy (North America)



PL insurance policy (Domestic & Asia)



ISO 14001



ISO 9001

• Product Certifications

*All products are CE certified



UL(Electric Hoist)



CE(Chain block)



CE(Lever hoist)



CE(Trolley)



S MARK(manual)



CE (Electric Hoist)



KCs (Electric Hoist)



Hoist (Patent)



With a three-speed gearbox Electric chain hoist (patent)



Including regenerative braking resistor Hoist (patent)



With discharge resistance Electric chain hoist (patent)



Hoist contactless Interface device (patent)

DAESAN ADVANCED CUTTING EDGE

Various Suspension Option

Top hook, light rail and motorized trolley suspension lug options are available to satisfy various application.

Gear Oil Inspection Port

Gear oil level can be easily inspected through the hole located at the side of the gear box.

Load Sheave

Load sheave features 5 pockets for smoother operation and better distribution of the load.

Friction Clutch

The friction clutch is an overload protection device that prevents lifting when overloaded.

Power Supply Cable

Power supply cable has strain relief built in to prevent cable damage.

Stepless Control with VFD

Hoist operation speed is controllable by the degree of push button press for smooth and precise operation.

Variable speed control

Our patented stepless control system is achieved via push button, interface and VFD.

Chain Box

Chain box is standard equipment comes with unique spring design to prevent chain box damage.

Heavy-Duty Hoist Motor

The hoist motor is high torque design and is rated 30-minute duty. Class F motor insulation and standard thermal motor protection is included.

Brake System

Simple fast acting conical style motor brake for years of trouble free operation.

Cooling Fan

Cooling fan is equipped to cool motor & brake resistor.

Magnet inside gear box

Small magnet is equipped inside the gear box to filter out foreign materials.

Hook

Load hook is a forged carbon steel hook with a heavy-duty hook latch. Thrust bearing in load hook allows 360° rotation to prevent twisting of load chain.

Chain Guide

Chain guide is designed suitable for minimizing wear on high-speed operation.

Push Button Control

Equipped with emergency stop button, the hoist speed changes depending on how much the button is pressed for stepless control hoist.

Upper/Lower Limit Switch

When the hoist is raised to high or low hook position the upper or lower limit switch activates and stops the hoist motor respectively. This prevents unnecessary clutch wear.



DL EDL DLM EDLM Series

SMART HOIST EDL Series

125KG, 250KG, 500KG



- Die casting & injection mold light and solid body
- TEFC enclosure with increased motor rating of 60%ED
- Strong and fast acting conical brake Easy maintenance
- Upper & Lower micro limit switches Activate and stop the hoist motor preventing unnecessary clutch wear
- Friction clutch is an overload Protection Device that prevents lifting when overloaded.
- Stepless Control by VFD The speed of the load movement is proportional to the movement of the stepless control switch when it is pressed.
- Various mounting features for different applications.
 - Lightweight rail mount lug
 - Top hook mount lug
 - Trolley mount lug
- Hoist with smallest Headroom in Korea

Smart Chain Hoist

DL, EDL TYPE


SPECIFICATIONS

MODEL		DL-			EDL-			DL-		EDL-			
Capacity(W.L.L)	Kg	125	250	500	125	250	500	125	250	125	250	500	
Power supply	Phase	3Ø						1Ø					
	V	220 / 380 / 440 (Customer's Requested Voltage)						110 / 220					
Chain fall	No.	1											
Standard lift	m	4						4					
Pushbutton cord length	m	3.5											
Lifting speed	50Hz	m / min	14.2	8.3	6.3	2.8~17	1.7~10	1.3~7.6	8.3	5.3	2.8~17	1.7~10	1.1~6.4
	60Hz	17	10	7.6	10				6.4				
Lifting motor	Kw	0.75											
Load chain(dia,pitch)	mm	Ø5.0 x 15.0											
Net weight	Kg	27			28			27		28			
Weight for additional 1meter lift	Kg/m	0.74											
Duty rating	%ED	40%ED (30min)			60 ~ 20%ED (40~10min)			20%ED (10min)		40 ~ 20%ED (30~10min)			

※EDL type is VFD equipped stepless control hoist that hoist operation speed is controllable by the degree of push button press for smooth, quiet and precise operation.

DL & EDL DIMENSION(mm)

MODEL	DL / EDL - 500	DL / EDL - 250,125	DL / EDL - 500	DL / EDL - 250,125	
Type	Hanger		Hook		
H : minimum headroom	A	446			
	B	229			
	C	217			
	D	360			
	E	156			
	F	204			
	G	34	30	34	30
	H	Min 320	Min 315	Min 350	Min 340
	I	20		18	
	J	20	18	20	18

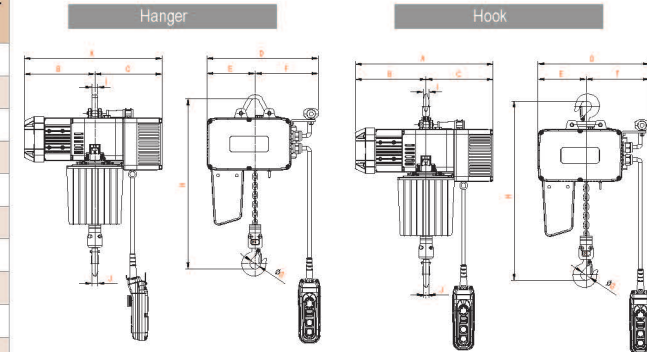

SPECIFICATIONS

MODEL		DLM-			EDLM-			DLM-		EDLM-			
Capacity(W.L.L)	Kg	125	250	500	125	250	500	125	250	125	250	500	
Power supply	Phase	3Ø						1Ø					
	V	220 / 380 / 440(Customer's Requested Voltage)						110 / 220					
Chain fall	No.	1											
Standard lift	m	4											
Pushbutton cord length	m	3.5											
Lifting speed	50Hz	m / min	14.2	8.3	6.3	2.8~17	1.7~10	1.3~7.6	8.3	5.3	2.8~17	1.7~10	1.1~6.4
	60Hz		17	10	7.6				10	6.4			
Traversing speed	50Hz	m / min	17.3			3.5~20.7			17.3		3.5~20.7		
	60Hz		20.7		20.7								
Lifting motor	Kw	0.75											
Traversing motor	Kw	0.4											
Load chain(dia.pitch)	mm	Ø5.0 x 15.0											
Net weight	Kg	51.5		52.5		51.5		52.5		51.5		52.5	
Weight for additional 1meter lift	Kg/m	0.84											
I-beam flange width	mm	75 - 150											
I-beam min. curve radius	mm	800											
Duty rating	%ED	40%ED (30min)			60~20%ED (40~10min)			20%ED (10min)		40~20%ED (30~10min)			

※ EDL type is VFD equipped stepless control hoist that hoist operation speed is controllable by the degree of push button press for smooth, quiet and precise operation.

DLM & EDLM DIMENSION(mm)

MODEL	DLM / EDLM - 500	DLM / EDLM - 250,125	
H : minimum headroom	A	480	
	B	252	
	C	228	
	D	360	
	E	156	
	F	204	
	G	34	30
	H	Min 350	Min 345
	I	135	
	J	20	18
	K	438	




* Dimensions A, B, and C are based on a beam width of 75 mm.

※ The trolley rubber bumper and traversing limit switch are optional.

DLP & EDLP DIMENSION(mm)

MODEL	DLP / EDLP - 500	DLP / EDLP - 250,125	
H : minimum headroom	A	446	
	B	229	
	C	217	
	D	360	
	E	156	
	F	204	
	G	34	30
	H	Min 350	Min 345
	I	122.5	
	J	20	18
	K	438	
I-beam flange width	75mm - 150mm		
I-beam min. curve radius	800mm		

▶ Refer to the DL / EDL specification table for Lifting motor specifications.

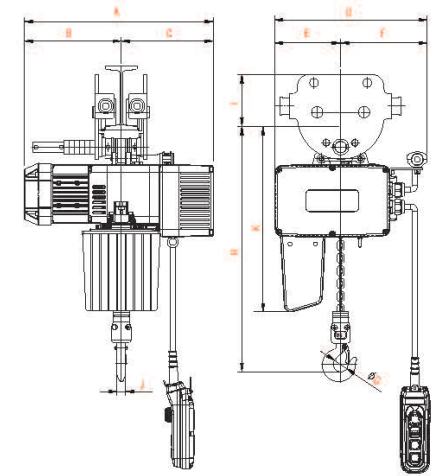


DLG & EDLG DIMENSION(mm)

MODEL	DLG / EDLG - 500	DLG / EDLG - 250,125	
H : minimum headroom	A	483.5	
	B	229	
	C	254.5	
	D	360	
	E	156	
	F	204	
	G	34	30
	H	Min 350	Min 345
	I	122.5	
	J	20	18
	K	438	
	M	3500	
I-beam flange width	75mm - 150mm		
I-beam min. curve radius	800mm		

▶ Refer to the DL / EDL specification table for Lifting motor specifications.

* Dimensions A, B, and C are based on a beam width of 75 mm.

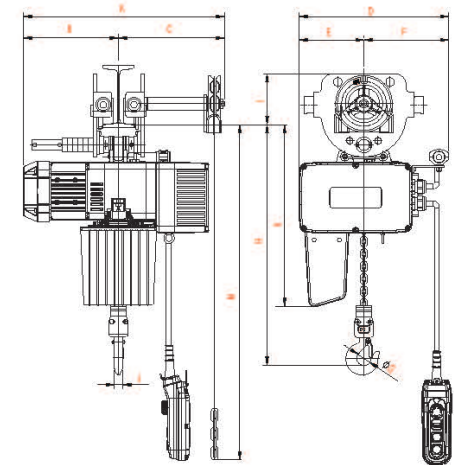

INNOVATION

EDSA
DSM
EDSA
EDSM

Traversing Limiter or Drop Stop & Rubber Bumper(Optional)

Trolley traversing limiter or Drop stop & Rubber bumper is available as an option.

Traversing Limiter




Upper and Lower Limit Switch

Prevent overwinding by stopping operation in the case of overlifting or overlowering.




Gear Box / Oil Lubrication

The gearbox utilizes an alloy steel helical and spur gear reduction. Gear inspection and lubrication is easily accessible from the top of the hoist.



Dual Brake System(Mechanical Brake+Electric Brake)

Secured with dual braking system, disc type motor brake working with mechanical load brake provides load lowering control. Electric brake is designed for easy access and simple adjustment.

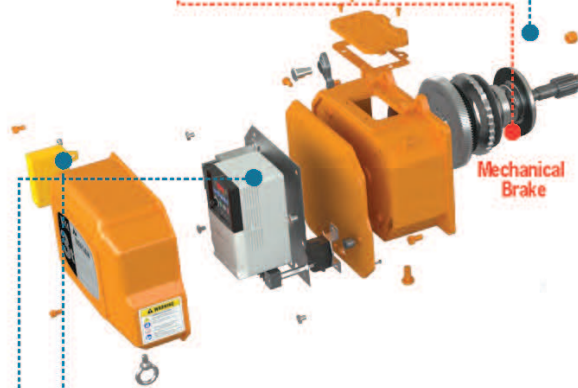

Mechanical Brake



Overload Alert(Optional)

Installed as load detecting safety device to help prevent overload for greater hoist longevity.



Inverter(Optional)

Adjustable dual lifting speed as well as dual traversing speed by variable frequency drive is available with EDSA/EDSM series from 1ton to 20ton. It is perfect type where precise and accurate lifting solution is required. Very silent and smooth lifting operation with great durability replaces conventional pole change type dual speed hoist. Speed setting can be adjusted upon customer request / 3 step lifting speed is optional.


Hooks

Load hook is forged carbon steel hook with a heavy-duty hook latch. Thrust bearing in hook allows 360° rotation to prevent twisting of load chain. Top Hook, for hook suspended hoists is rigid.



Weather Cover(Optional)


Hoist weather cover is a practical product that increases the longevity of your hoists perfect for seasonal and permanent installations. Protect hoist in outdoor use.



Motorized Trolley

Trolley is adjustable for a range of flange widths. Motor includes disc type brake. Side guide rollers are included to promote smooth trolley motion and to minimize wheel and beam wear. Wheels are dual tread design for operation on tapered or flat flange beams. Trolley motor includes class F insulation. Motor is rated 15 minute duty and includes standard thermal motor protection.

Drop Stop & Rubber bumper



Electric Brake

Load Sheave / Chain Guide

Full floating chain guide assures proper engagement of chain on load sheave. Features 4 or 5 pockets for better distribution of the load.

Heavy-Duty Hoist Motor

The hoist motor is high torque design and is rated 30-minute duty. Class F motor insulation and standard thermal motor protection is included.

Load Chain

G80 load chain is case hardened and has a high resistance to wear and corrosion. Longer lifts are available per requirement. Breaking load limit with more than 5 times of rated load.


Chain Container

Chain container is standard equipment and is either molded with thick polypropylene material or fabricated from steel to securely contain the chain and chain lubricant. Optional containers are available for long lift applications.



Push Button Control

Compact design to enable one-handed operation. Rated IP64 protection. Emergency stop button is included. Push button cable has strain relief to prevent cable damage.

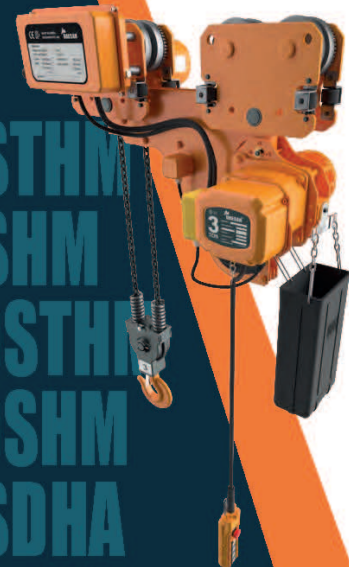

EDSM
EDSM
EDSM
EDSM
EDSM
EDSM
EDSM
EDSM
EDSM
EDSM


DUAL BRAKE HOIST (SINGLE SPEED & INVERTER CONTROL)

DSA,EDSA Series

SPECIFICATIONS

MODEL	DSA	SINGLE SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	10W	15W	20W						
	EDSA	DUAL SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	10W	15W	20W						
Capacity(W.L.L)	Ton	Customer's Requested Voltage																			
Power supply	Voltage	Customer's Requested Voltage																			
Standard lift	m	4						5													
Pushbutton cord length	m	3.5						4.5													
Chain fall	No.	1		2		1		2		3		4		8							
Lifting speed	m / min	SINGLE SPEED (50/60Hz)		6.8 / 8.2	8.6 / 10.3	3.4 / 4.1	6.7 / 8.1	5.4 / 6.5		4.35/5.15		2.75/3.25	1.8 / 2.1	2.75/3.25	1.8 / 2.1	1.3 / 1.6					
		DUAL SPEED		2.2 - 6.4	3.0 - 9.2	1.1 - 3.2	2.2 - 6.5	2.7 - 6.5		1.5 - 4.6		1.35 - 3.25	0.9 - 2.1	1.35 - 3.25	0.9 - 2.1	0.67 - 1.6					
Lifting motor	Kw	1.8		3.5		1.8		3.5		3.5		3.5		3.5 x 2							
Load chain (dia x pitch)	mm	7.1 x 21		9.5 x 28.6		7.1 x 21		11.2 x 34		9.5 x 28.6		11.2 x 34									
Net weight	Kg	SINGLE SPEED		72	118	85	121	127		147	167	274	407	796	901						
		DUAL SPEED		74	120	87	123	129		149	169	276	411	800	905						
Weight for additional 1meter lift	Kg	1.3		2.16		2.4		2.86		4.12		5.52		8.18		10.84		16.16		21.48	
Duty rating	%ED	SINGLE SPEED (50/60Hz)		40%ED (30min)																	
		DUAL SPEED		40/20%ED (30/10min)																	

*Inverter speed setting can be adjusted upon customer's request

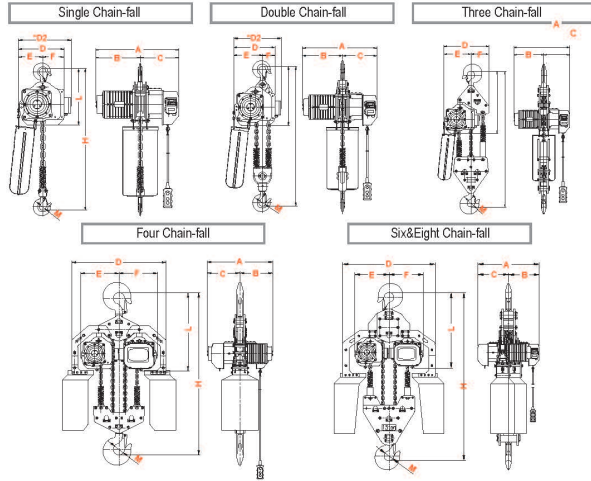

DIMENSION(mm)


MODEL	DSA	SINGLE SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	10W	15W	20W		
	EDSA	DUAL SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	10W	15W	20W		
H : minimum headroom	A			572	671	572	671				716	764	806				
				622	701	622	701				716	823	866				
	B			298	358	298	358						382	403			
												412	433				
	C			274	313	274	313						358	382	403		
				324	343	324	343						358	412	433		
	D			300	370	300	370						538	1032	1152		
		D2		357	430	357	430						N/A				
	E			170	198	219	198				258	273	325	405	426		
				130	172	82	172						112	102	426		
	F			130	172	82	172						112	102	426		
												112	102	426			
	M			35	53.5		60						70	90	120		
	H			566	715	805	755		775		945	1060	1440		1790		
				405	483	490	483		490		560	580	740		822		
L			405	483	490	483		490		560	580	740		822			

DSM,EDSM Series

SPECIFICATIONS

MODEL	DSM	SINGLE SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	DSMS 7.5W	10W	DSMS 10W	15W	20W				
	EDSM	DUAL SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	EDSMS 7.5W	10W	EDSMS 10W	15W	20W				
Capacity(W.L.L)	Ton	Customer's Requested Voltage																			
Power supply	Voltage	Customer's Requested Voltage																			
Standard lift	m	4						5													
Pushbutton cord length	m	3.5						4.5													
Chain fall	No.	1		2		1		2		3		4		6		8					
Lifting speed	m / min	SINGLE SPEED (50/60Hz)		6.8 / 8.2	8.6 / 10.3	3.4 / 4.1	6.7 / 8.1	5.4 / 6.5		4.35/5.15		2.75/3.25	1.8 / 2.1	2.75/3.25	1.8 / 2.1	1.3 / 1.6					
		DUAL SPEED		2.2 - 6.4	3.0 - 9.2	1.1 - 3.2	2.2 - 6.5	2.7 - 6.5		1.5 - 4.6		1.35 - 3.25	0.9 - 2.1	1.35 - 3.25	0.9 - 2.1	0.67 - 1.6					
Traversing speed	m / min	SINGLE SPEED (50/60Hz)		12 / 15						11 / 14											
		DUAL SPEED		5.2 - 15.2						3.3 - 10											
Lifting motor	Kw	1.8		3.5		1.8		3.5		3.5		3.5		3.5 x 2							
Traversing motor	Kw	0.4		0.75		0.75		0.75		0.75		0.75		0.75							
Load chain (dia x pitch)	mm	7.1 x 21		9.5 x 28.6		7.1 x 21		11.2 x 34		9.5 x 28.6		11.2 x 34									
I-beam flange width	mm	75 - 125		100 - 150		125 - 175		150 - 190		175 - 190		190 - 215		215 - 240							
I-beam min. curve radius	mm	800		1000		1800		N/A		2000		N/A		2000		N/A					
Weight for additional 1meter lift	Kg	1.38		2.24		2.48		2.94		4.2		5.6		8.26		10.92		16.24		21.56	
Net weight	Kg	SINGLE SPEED		105	162	128	169	201		221	254	518	478	657	614	1066	1171				
		DUAL SPEED		109	166	132	173	205		225	258	522	482	663	620	1074	1179				
Duty rating	%ED	SINGLE SPEED (50/60Hz)		40%ED (30min)																	
		DUAL SPEED		40/20%ED (30/10min)																	

*Inverter speed setting can be adjusted upon customer's request

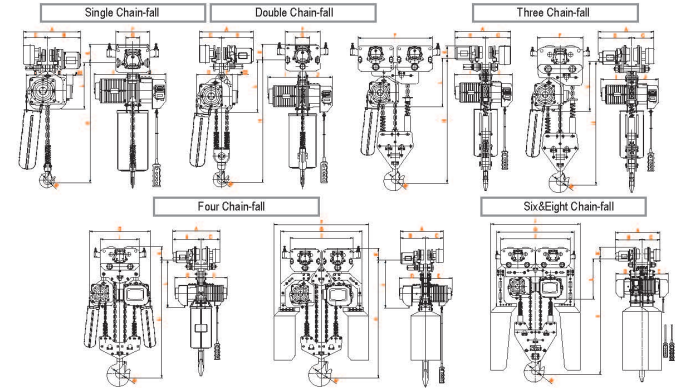

DIMENSION(mm)

※ The trolley rubber bumper and traversing limit switch are optional.

MODEL	DSM	SINGLE SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	DSMS 7.5W	10W	DSMS 10W	15W	20W		
	EDSM	DUAL SPEED		1S	1.5S	2W	2S	2.5S	3S	3W	5W	7.5W	EDSMS 7.5W	10W	EDSMS 10W	15W	20W		
B calculation B = 1/2 x (I-Beam width(mm))	A			498+2B	527+2B		562+2B		585+2B		643+2B		585+2B	643+2B	689+2B	731+2B			
				548+2B	577+2B		602+2B		635+2B		693+2B		635+2B	693+2B	739+2B	781+2B			
				290+B	304+B		328+B		343+B		386+B		343+B	386+B	409+B	430+B			
	B			208+B	223+B		224+B		242+B		257+B		242+B		257+B		280+B		
				258+B	273+B		274+B		292+B		307+B		292+B		307+B		330+B		
	C			170	198	219	198				258	273	N/A		358			378	402.5
																		428	430.5
	D			130	172	82	172						112	102	N/A		358	428	
																		428	
	E							60				56		N/A		N/A			
F			298	315		360				410		860	530	1300	NA	1416			
			110	126		140				156		N/A		1098	824	1095			
G			298	358	298	358				358		850		530	1070				
			274	313	274	313				313		N/A		N/A					
H			324	343	324	343				343		N/A		N/A					
I			165	161		156				160		185		160		184			
			35	53.5		60				70		90		120					
J			593	700	782	738		762		934	1062	1360	1245	1240	1237	1500			
			405	460	477	460		465		532	595	587	575	648	643	617			

LOW HEADROOM HOIST


DSTHM, DSHM, EDSTM, EDSHM Series



SPECIFICATIONS

MODEL		SINGLE SPEED	DSTHM-1S	DSTHM-2W	DSHM-1S	DSHM-1.5S	DSHM-2W	DSHM-2S	DSHM-2.5S	DSHM-3S	DSHM-3W	DSHM-5W		
		DUAL SPEED	EDSTM-1S	EDSTM-2W	EDSHM-1S	EDSHM-1.5S	EDSHM-2W	EDSHM-2S	EDSHM-2.5S	EDSHM-3S	EDSHM-3W	EDSHM-5W		
Capacity(W.L.L)	Ton		1	2	1	1.5	2	2	2.5	3		5		
Power supply	Voltage	Customer's Requested Voltage												
Standard lift	m	4												
Chain fall	No.	1	2	1	2	1	2	1	2	3	2			
Lifting speed	m / min	SINGLE SPEED (600Hz)	6.8 / 8.2	3.4 / 4.1	6.8 / 8.2	8.6 / 10.3	3.4 / 4.1	6.7 / 8.1	5.4 / 6.5	4.35 / 5.15	2.75 / 3.25			
		DUAL SPEED	2.7 - 8.2	1.3 - 4.1	2.2 - 6.4	3.0 - 9.2	1.1 - 3.2	2.2 - 6.5	2.7 - 6.5	1.5 - 4.6	1.35 - 3.25			
Traversing speed	m / min	SINGLE SPEED (600Hz)	12 / 15											
		DUAL SPEED	5.2 - 15.2											
Lifting motor	Kw	1.8		3.5		1.8		3.5		0.75				
Traversing motor	Kw	0.4												
Load chain dia x Pitch	mm	7.1 x 21			9.5 x 28.6		7.1 x 21		11.2 x 34			9.5 x 28.6		11.2 x 34
I-beam flange width	mm	75 - 125		100 - 150		75 - 125		100 - 150					125 - 175	
I-beam min. curve radius	mm	N/A												
Weight for additional 1 meter lift	Kg	1.38	2.48	1.38	2.2	2.48	2.94			4.2	5.6			
Net weight	Kg	SINGLE SPEED	132	150.5	146	215	168.5	222	258	279	332			
		DUAL SPEED	134	152.5	148	217	168.5	224	260	281	334			
Duty rating	%ED	SINGLE SPEED (600Hz)	40%ED (30min)											
		DUAL SPEED	40/20%ED (30/10min)											

*Inverter speed setting can be adjusted upon customer's request

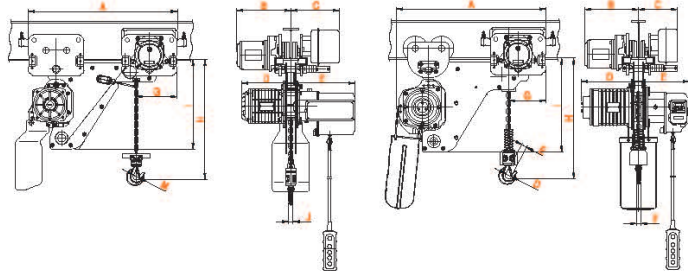

DIMENSION (mm)


* The trolley rubber bumper and traversing limit switch are optional.

CODE	1속식	DSTHM-1S	DSTHM-2W	DSHM-1S	DSHM-1.5S	DSHM-2W	DSHM-2S	DSHM-2.5S	DSHM-3S	DSHM-3W	DSHM-5W
	2속식(인버터 타입)	EDSTM-1S	EDSTM-2W	EDSHM-1S	EDSHM-1.5S	EDSHM-2W	EDSHM-2S	EDSHM-2.5S	EDSHM-3S	EDSHM-3W	EDSHM-5W
B calculation B = 1/2 x (I-Beam width)(mm) H : minimum headroom	A	798	815	800	864	808	864		889		907
	B	235+B	230+B	230+B		304+B			328+B		343+B
	C	212+B	215+B	208+B		223+B			224+B		242+B
		262+B	265+B	258+B		273+B			274+B		292+B
	D		264	298	358	298			358		
	E		293	274	313	274			313		
			343	324	343	324			343		
	G	219	188	200	167	229	167		192		208
	H	265	455	435	441	545	483	496		600	690
	I	483	513	505	556	510	555		558		565
J	24	30	24		30			35		43.5	
M	35	63.5	35		53.5			60		70	

DAESAN low headroom type electric chain hoist is specially designed to have shorter headroom. It is suitable for installation which requires low ceiling making it effective for work that hoists the cargo as high as possible. Special requirements such as dual speed or curved beam is optional.

TWIN HOOK TYPE HOIST

DSDHA, DSDHM Series

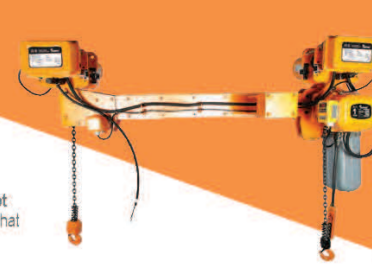

SPECIFICATIONS


MODEL		DSDHA	SINGLE SPEED	1S	1.5S	2W	2S	2.5S	3S	3W	5W		
		EDSDHA	DUAL SPEED	1S	1.5S	2W	2S	2.5S	3S	3W	5W		
Capacity	Ton			1	1.5	2		2.5		3	5		
Power supply	Voltage	Customer's Requested Voltage											
Standard lift	m	4											
Chain fall	No.	1		2		1		2					
Pushbutton cord length	m	3.5											
Lifting speed	m / min	SINGLE SPEED (600Hz)	6.8 / 8.2	8.6 / 10.3	3.4 / 4.1	6.7 / 8.1	5.4 / 6.5		4.35 / 5.15	2.75 / 3.25			
		DUAL SPEED	2.2 - 6.4	3.0 - 9.2	1.1 - 3.2	2.2 - 6.5	2.7 - 6.5		1.5 - 4.6	1.35 - 3.25			
Traversing speed	m / min	SINGLE SPEED (600Hz)	12 / 15								11 / 14		
		DUAL SPEED	5.2 - 15.2								11 / 14		
Lifting motor	Kw	1.8		3.5		1.8		3.5					
Traversing motor	Kw	0.4											
Load chain (dia x pitch)	mm	7.1 x 21		9.5 x 28.6		7.1 x 21		11.2 x 34			9.5 x 28.6		11.2 x 34
Weight for additional 1 meter lift	Kg	2.48	4.2	4.68	5.6			8.12	10.92				
Duty rating	%ED	SINGLE SPEED (600Hz)	40%ED (30min)										
		DUAL SPEED	40/20%ED (30/10min)										

SPECIFICATIONS

MODEL		DSDHM	SINGLE SPEED	1S	1.5S	2W	2S	2.5S	3S	3W	5W		
		EDSDHM	DUAL SPEED	1S	1.5S	2W	2S	2.5S	3S	3W	5W		
Capacity	Ton			1	1.5	2		2.5		3	5		
Power supply	Voltage	Customer's Requested Voltage											
Standard lift	m	4											
Chain fall	No.	1		2		1		2					
Lifting speed	m / min	SINGLE SPEED (600Hz)	6.8 / 8.2	8.6 / 10.3	3.4 / 4.1	6.7 / 8.1	5.4 / 6.5		4.35 / 5.15	2.75 / 3.25			
		DUAL SPEED	2.2 - 6.4	3.0 - 9.2	1.1 - 3.2	2.2 - 6.5	2.7 - 6.5		1.5 - 4.6	1.35 - 3.25			
Traversing speed	m / min	SINGLE SPEED (600Hz)	12 / 15								11 / 14		
		DUAL SPEED	5.2 - 15.2								11 / 14		
Lifting motor	Kw	1.8		3.5		1.8		3.5					
Traversing motor	Kw	0.4											
Load chain dia x Pitch	mm	7.1 x 21		9.5 x 28.6		7.1 x 21		11.2 x 34			9.5 x 28.6		11.2 x 34
I-beam flange width	mm	75 - 125		100 - 150									125 - 175
I-beam min. curve radius	mm	Inquire separately when ordering											
Weight for additional 1 meter lift	Kg	2.48	4.2	4.68	5.6			8.12	10.92				
Duty rating	%ED	SINGLE SPEED (600Hz)	40%ED (30min)										
		DUAL SPEED	40/20%ED (30/10min)										

DIMENSION (mm)

MODEL : DSDHA, DSDHM	1S	1.5S	2W	2S	2.5S	3S	3W	5W
A	274	313	274			313		
	324	343	324			343		
B	298	358	298			358		
C	170	198	170		198		258	273
D	369	448	369			448		
E	51	56	70		55		92	96
F	G+ C+135.5					G+C+156		G+C+176
G	800-4000							
H	566	715	805	755	775	945	1060	
I	583	700	782	738	762	934	1062	
J	23.5		39			45	56	
K	35		53.5			60	70	
L	24		30			35	43.5	
M	71	90	71			90		

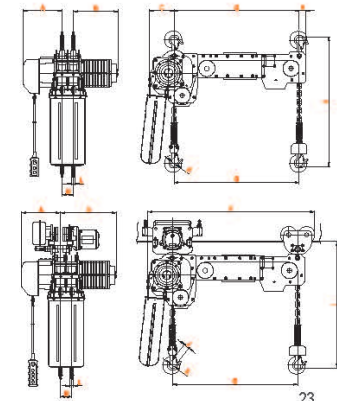

REVOLUTION


Traversing Limiter or Drop Stop & Rubber Bumper(Optional)

Trolley traversing limiter or Drop stop & Rubber bumper is available as an option.



Dual Safety Device Friction clutch & Upper limit switch

The friction clutch is an overload protection device that idles the motor when overloaded. This function combined with overload limiter to prevent the hoist body or load chain from being damaged. In addition, when a load is lifted excessively the limit switch activates and stops the motor, preventing hoist and load chain damage.



Gear Box / Oil Lubrication

The gearbox utilizes an alloy steel helical and spur gear reduction. Gear inspection and lubrication is easily accessible from the top of the hoist.



Load Sheave / Chain Guide

Full floating chain guide assures proper engagement of chain on load sheave. Features 5 pockets for better distribution of the load.

Overload Alert(Optional)

Installed as load detecting safety device to help prevent overload for greater hoist longevity.



Hooks

Load hook is forged carbon steel hook with a heavy-duty hook latch. Thrust bearing in hook allows 360° rotation to prevent twisting of load chain. Top Hook, for hook suspended hoists is rigid.

Inverter(Optional)

Adjustable dual lifting speed as well as dual traversing speed by variable frequency drive is available with EDSS / EDSSM / EDST / EDSTM Series from 0.5ton to 2ton. It is perfect type where precise and accurate lifting solution is required. Very silent and smooth lifting operation with great durability replaces conventional pole change type dual speed hoist. Speed setting can be adjusted upon customer request / 3 step lifting speed is optional.



Weather Cover (Option)

Hoist weather cover is a practical product that increases the longevity of your hoists perfect for seasonal and permanent installations. Protect hoist in outdoor use.



Motorized Trolley

Trolley is adjustable for a range of flange widths. Motor includes disc type brake. Side guide rollers are included to promote smooth trolley motion and to minimize wheel and beam wear. Wheels are dual tread design for operation on tapered or flat flange beams. Trolley motor includes class F insulation. Motor is rated 15 minute duty and includes standard thermal motor protection.

Drop Stop & Rubber bumper

Brake System

Operated by powerful pull rotor using magnetic force, it is cone type brake. It has brake lining clearance adjustment function that maximize the lifetime of brake lining.

Heavy-Duty Hoist Motor

The hoist motor is high torque design and is rated 30-minute duty. Class F motor insulation and standard thermal motor protection is included.

Load Chain

G80 load chain is case hardened and has a high resistance to wear and corrosion. Longer lifts are available per requirement. Breaking load limit with more than 5 times of rated load.

Chain Container

Chain container is standard equipment molded with thick polypropylene material to securely contain the chain and chain lubricant. Optional containers are available for long lift applications.

Push Button Control

Compact design to enable one-handed operation. Rated IP64 protection. Emergency stop button is included. Push button cable has strain relief to prevent cable damage.



DSTM
EDSTM
DSSM
EDSSM

FRICION CLUTCH HOIST

DST Series



THREE PHASE

SPECIFICATIONS

MODEL : DST		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	Customer's Requested Voltage		
Standard lift	m	4		
Chain fall	No.	1		2
Lifting speed range(m/min)	50 Hz	6.7	6.8	3.4
	60 Hz	8	8.2(5.5)	4.1
Hoist motor	Kw	0.8		1.8
Load chain	dia x pitch	6.3 x 19		7.1 x 21
Net weight	Kg	57	58	71
Duty rating	%ED	40%ED (30min)		

DIMENSION(mm)

MODEL : DST		0.5S	1S	2W
H : minimum headroom	A	523	526	
	B	264		
	C	262		
	D	311		
	E	146	198	
	F	165	113	
	M	34	35	53.5
	H	384	400	680
	L	324		428

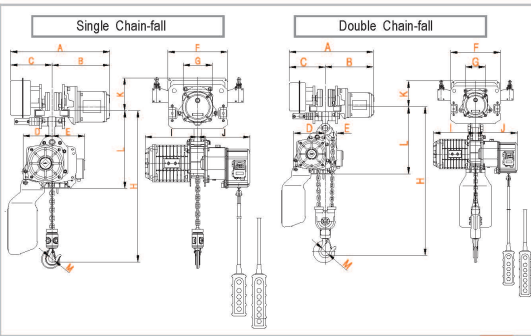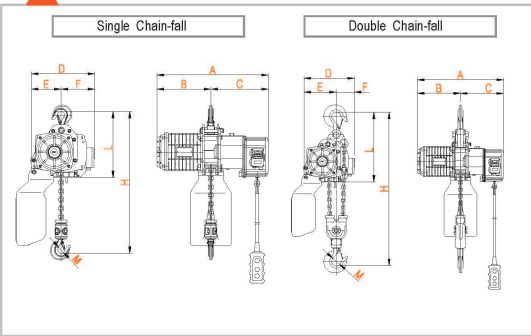

※ The trolley rubber bumper and traversing limit switch are optional.

DSS Series



SINGLE PHASE

SPECIFICATIONS

MODEL : DSS		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	110 / 220		
Standard lift	m	4		
Chain fall	No.	1		2
Lifting speed range(m/min)	50 Hz	6.7	3.4	1.7
	60 Hz	8	4.1	2
Hoist motor	Kw	0.8		
Load chain	dia x pitch	6.3 x 19		7.1 x 21
Net weight	Kg	57	60	73
Duty rating	%ED	30%ED (20min)		

DIMENSION(mm)

MODEL : DSS		0.5S	1S	2W
H : minimum headroom	A	526	545	
	B	264		
	C	262	281	
	D	311		
	E	146	198	
	F	165	113	
	M	34	35	53.5
	H	384	400	680
	L	324		428

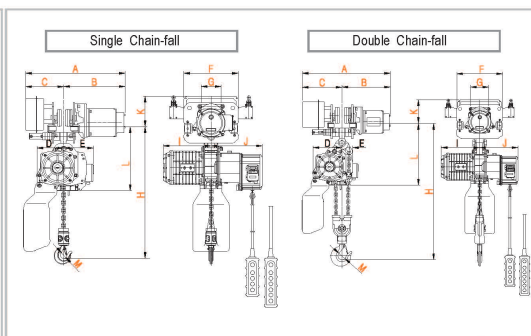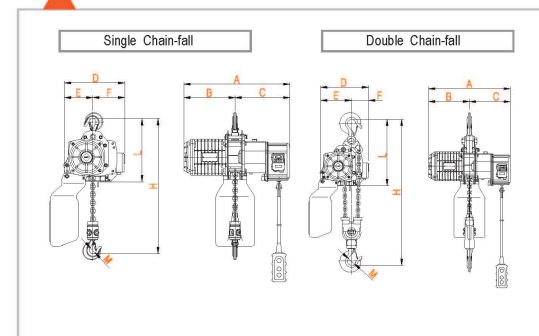

※ The trolley rubber bumper and traversing limit switch are optional.

DSTM Series

THREE PHASE

SPECIFICATIONS

MODEL : DSTM		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	Customer's Requested Voltage		
Standard lift	m	4		
Chain fall	No.	1		2
Lifting speed range(m/min)	50 Hz	6.7	6.8	3.4
	60 Hz	8	8.2(5.5)	4.1
Trolley speed(m/min)	50 Hz	12		
	60 Hz	15		
Hoist motor	Kw	0.8		1.8
Trolley motor	Kw	0.4		
Load chain	dia x pitch	6.3 x 19		7.1 x 21
I-beam flange width	I-beam width	75 - 125	100 - 150	
I-beam min. curve radius	Curve radius	800		
Net weight	Kg	97	98	117
Duty rating	%ED	40%ED (30min)		

DIMENSION(mm)

MODEL : DSTM		0.5S	1S	2W
B calculation B = 1/2 x (I-Beam width(mm)) H : minimum headroom	A	498+2B	528+2B	
	B	208+B	223+B	
	C	290+B	305+B	
	D	146	198	
	E	165	113	
	F	300	315	
	G	110	125.4	
	I	264		
	J	262		
	K	165	161	
	M	34	35	53.5
	H	434	446	660
	L	359		424

DSSM Series

SINGLE PHASE

SPECIFICATIONS

MODEL : DSSM		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	110 / 220		
Standard lift	m	4		
Chain fall	No.	1		2
Lifting speed range(m/min)	50 Hz	6.7	3.4	1.7
	60 Hz	8	4.1	2
Trolley speed(m/min)	50 Hz	9		
	60 Hz	11		
Hoist motor	Kw	0.8		
Trolley motor	Kw	0.2		
Load chain	dia x pitch	6.3 x 19		7.1 x 21
I-beam flange width	I-beam width	75 - 125	100 - 150	
I-beam min. curve radius	Curve radius	800		
Net weight	Kg	96	99	119
Duty rating	%ED	30%ED (20min)		

DIMENSION(mm)

MODEL : DSSM		0.5S	1S	2W
B calculation B = 1/2 x (I-Beam width(mm)) H : minimum headroom	A	546+2B	576+2B	
	B	338+B	353+B	
	C	208+B	223+B	
	D	146	198	
	E	165	113	
	F	300	315	
	G	110	125.4	
	H	434	446	660
	I	264		
	J	281		
	K	165	161	
	L	359	424	
	M	34	35	53.5



FRICION CLUTCH INVERTER HOIST

EDST Series

THREE PHASE



SPECIFICATIONS

MODEL : EDST		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	220 / 380 / 440		
Standard lift	m	4		
Chain fall	No.	1	2	
Lifting speed range(m/min)	2Speed	2.7 - 8.2	1.3 - 4.1	
Hoist motor	Kw	0.8	1.8	
Load chain	dia x pitch	6.3 x 19	7.1 x 21	
Net weight	Kg	61	63	77
Duty rating	%ED	40/20%ED (30/10min)		

DIMENSION(mm)

MODEL : EDST		0.5S	1S	2W
H : minimum headroom	A	606		
	B	264		
	C	342		
	D	329		
	E	146	198	
	F	183	131	
	M	34	35	53.5
	H	384	400	680
	L	358	462	

EDSS Series

SINGLE PHASE





SPECIFICATIONS



MODEL : EDSS		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	220		
Standard lift	m	4		
Chain fall	No.	1	2	
Lifting speed range(m/min)	2Speed	1.7 - 5.2	1.0 - 2.6	
Hoist motor	Kw	0.8	1.5	
Load chain	dia x pitch	6.3 x 19	7.1 x 21	
Net weight	Kg	63	64	77
Duty rating	%ED	40/20%ED (30/10min)		

DIMENSION(mm)

MODEL : EDSS		0.5S	1S	2W
H : minimum headroom	A	606		
	B	264		
	C	342		
	D	311		
	E	146	198	
	F	165	113	
	M	34	35	53.5
	H	384	400	680
	L	378	482	

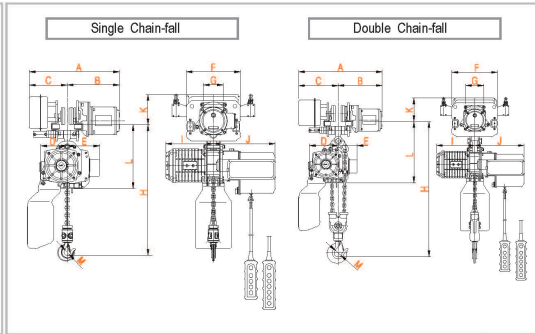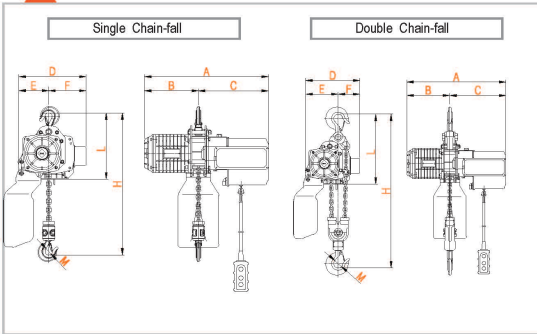

※ The trolley rubber bumper and traversing limit switch are optional.

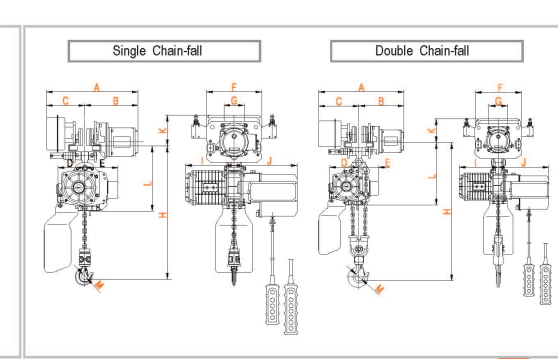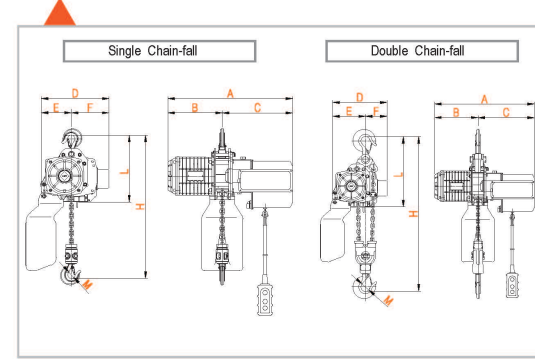

※ The trolley rubber bumper and traversing limit switch are optional.

EDSTM Series

THREE PHASE

SPECIFICATIONS

MODEL : EDSTM		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	220 / 380 / 440		
Standard lift	m	4		
Chain fall	No.	1	2	
Lifting speed range(m/min)	2Speed	2.7 - 8.2	1.3 - 4.1	
Trolley speed(m/min)	2Speed	5.2 - 15.2		
Hoist motor	Kw	0.8	1.8	
Trolley motor	Kw	0.4		
Load chain	dia x pitch	6.3 x 19	7.1 x 21	
I-beam flange width	I-beam width	75 - 125	100 - 150	
I-beam min. curve radius	Curve radius	800		
Net weight	Kg	101	102	122
Duty rating	%ED	40/20%ED (30/10min)		

DIMENSION(mm)

MODEL : EDSTM		0.5S	1S	2W	
B calculation B = 1/2 x (I-Beam width(mm))	A	548+2B	577+2B		
	B	290+B	304+B		
	C	258+B	273+B		
	D	146	198		
	E	183	131		
	F	300	315		
	G	110	125.4		
	H	434	446	660	
	I	264			
	J	342			
	K	165	161		
	L	393	458		
	M	34	35	53.5	

EDSSM Series

SINGLE PHASE


SPECIFICATIONS

MODEL : EDSSM		0.5S	1S	2W
Capacity	Ton	0.5	1	2
Power supply	Voltage	220		
Standard lift	m	4		
Chain fall	No.	1	2	
Lifting speed range(m/min)	2Speed	1.7 - 5.2	1.0 - 2.6	
Trolley speed(m/min)	11			
Hoist motor	Kw	0.8	1.5	
Trolley motor	Kw	0.2		
Load chain	dia x pitch	6.3 x 19	7.1 x 21	
I-beam flange width	I-beam width	75 - 125	100 - 150	
I-beam min. curve radius	Curve radius	800		
Net weight	Kg	98	99	122
Duty rating	%ED	40/20%ED (30/10min)		

DIMENSION(mm)

MODEL : EDSSM		0.5S	1S	2W	
B calculation B = 1/2 x (I-Beam width(mm))	A	547+2B	576+2B		
	B	339+B	353+B		
	C	208+B	223+B		
	D	146	198		
	E	165	113		
	F	300	315		
	G	110	125.4		
	H	434	446	660	
	I	264			
	J	342			
	K	165	161		
	L	393	458		
	M	34	35	53.5	

DAESAN MANUAL HOIST

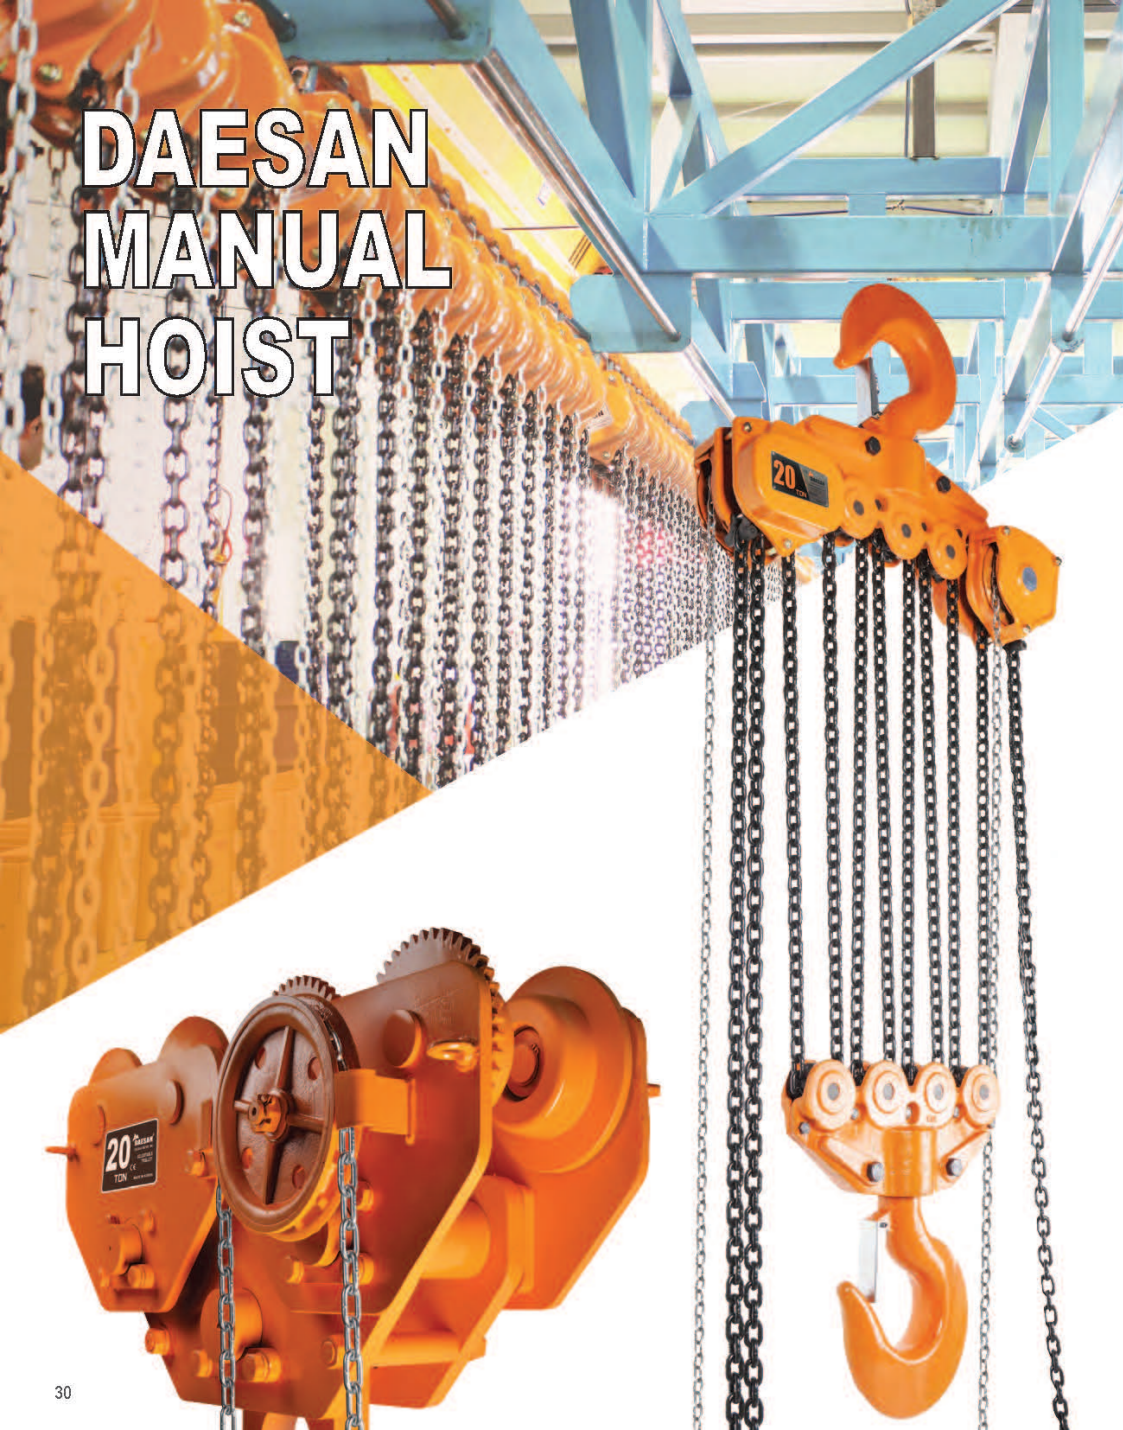

CHAIN BLOCK

DAESAN portable, light weight hand chain hoists are compact and provide a dependable working tool for industrial maintenance, construction sites, machine shops, and production situations where parts need to be positioned accurately but infrequently.

Covers : Protective steel covers can easily be removed for inspection and maintenance. Wheel cover & brake cover protect block from dust and rain.

Mechanical Load Brake : Can hold a capacity load stationary at any position.

Hooks : All hooks are drop forged, heat treated steel with spring type latches. Both hook rotates 360 for easy rigging.


Chain Guide : Allows smooth operation of load chain.

Load Sheaves : Deep cast pockets precisely fit the load chain. Load shafts are supported by prelubricated bearings for smooth operation.

Load Chain : Electric welded G80 alloy steel chain is heat treated for wear resistance and strength. Accurately and uniformly sized to seat properly in load sheaves.

* Overload protection by slip clutch system (Option)

■ For the last 3 decades DSN series had been sold over 1,000,000 units in Korea and overseas.

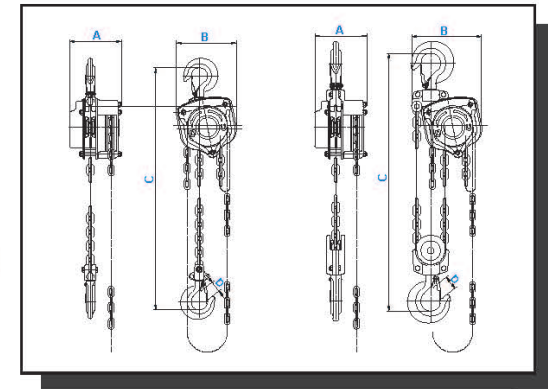


DSN TYPE

MODEL NO :	DSN0.5	DSN1	DSN1.5	DSN2N	DSN2	DSN3	DSN5	DSN7.5	DSN10	DSN15	DSN20	DSN25	DSN30	DSN40	
Capacity(SWL)	Ton	0.5	1	1.5	2	2	3	5	7.5	10	15	20	25	30	40
Chainfall	No.	1	1	1	2	1	2	2	3	4	6	8	10	12	16
Standard lift	m	2.5	2.5	2.5	3	3	3	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
Load chain dia.	mm	6.3 x 19.1	6.3 x 19.1	7.1 x 21.0	6.3 x 19.1	7.9 x 23.0	7.1 x 21.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0
Hand chain	mm	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8	5.0 x 22.8
Net weight	Kg	11	12	14	18	22	23	41	63	86	131.5	209	393	536	696
Pulling efforts	Kg	24	33	34	33	34	35	39	40	41	41 x 2	41 x 2	41 x 2	41 x 2	41 x 2
A (Dimension)	mm	147	147	147	150	184	147	185	185	185	212	212	388	426	502
B		145	145	164	179	187	206	258	367	367	745	873	798	798	798
C		310	330	360	430	380	480	620	720	820	850	970	1500	1870	1960
D		26	30	33	38	38	42	45	63	86	132	178	85	95	95

DAESAN MANUAL HOIST REVOLUTION

LEVER HOIST-NDM TYPE

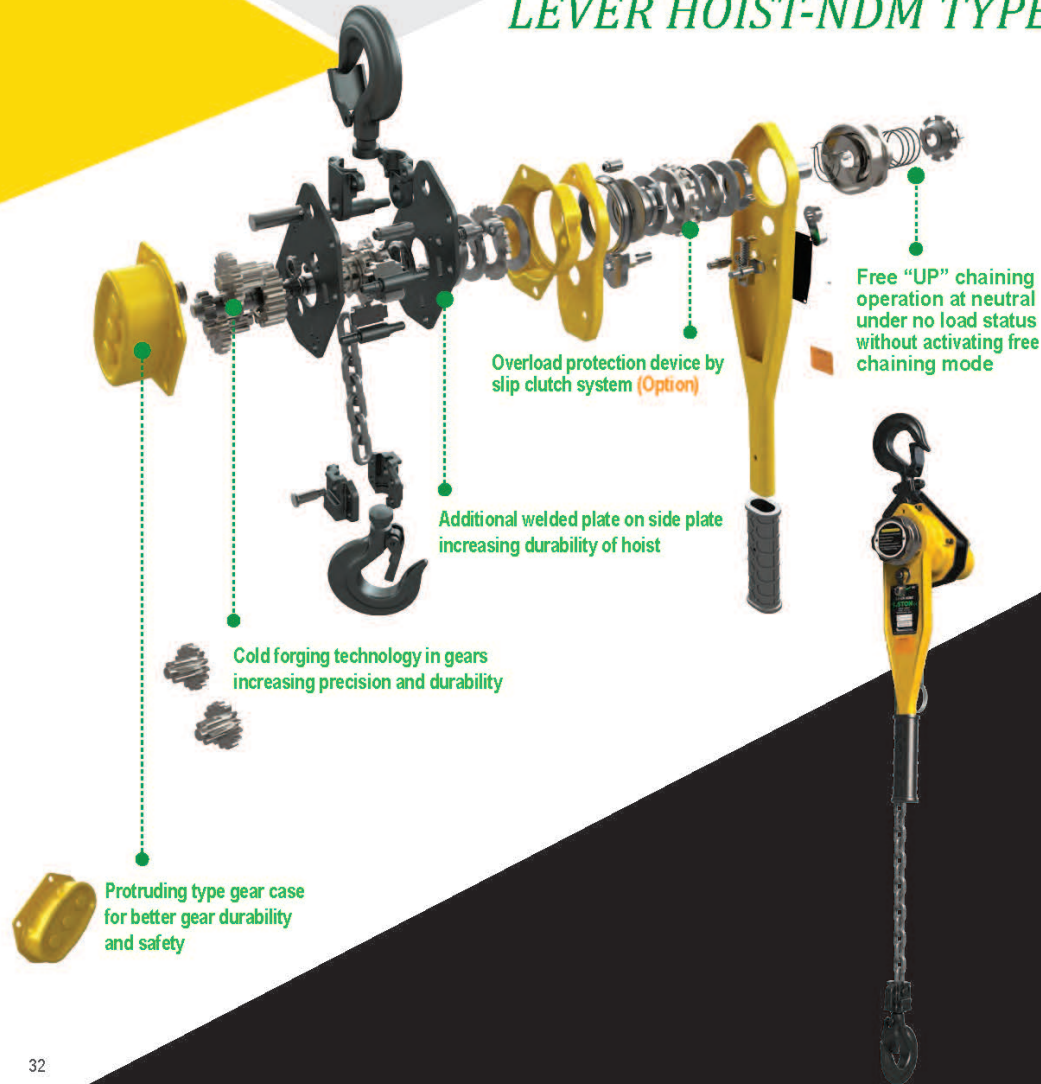


LEVER HOIST

NDM TYPE

DAESAN NDM lever hoist is one of the most reliable and durable ratchet lever hoists in the industry. Its light weight and portable design, easy free-chaining feature and 360° rotating handle make it one of the most versatile hoists on the market today.

- Cold-Forging technology in gears increasing precision and durability
- Protruding type gear case for better safety
- Additional welded plate on side plate increasing durability
- Free "UP" chaining operation at neutral under no load status without activating free chaining mode
- Overload protection by slip clutch system (Option)

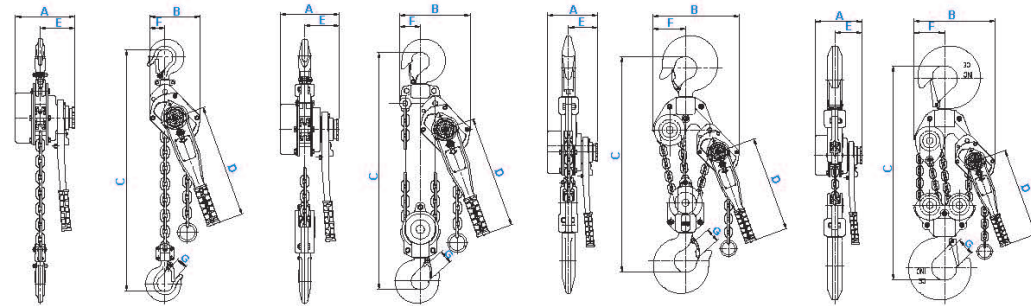


NDM TYPE

MODEL NO :	NDM08	NDM15	NDM20	NDM30	NDM60	NDM90	NDM120
Capacity(SWL) (ton)	0.8	1.5	2	3	6	9	12
Chain fall (no.)	1	1	1	1	2	3	4
Standard lift (m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Load chain dia. (mm)	6.3 x 19.1	7.1 x 21.0	7.1 x 21.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0
Net weight (kg)	7	10.5	11	17.5	29	56	74
Pulling efforts (kg)	30	30	40	37	38	39	40
A (Dimension) (mm)	155.5	168.5	168.5	201	201	201	201
B	121	141.5	141.5	172.5	241	349	349
C	329.5	379	385	465	615	775	880
D	273	336	336	336	336	336	336
E	102	107	107	117	117	117	117
F	38	45	45	52	70	131	131
G	25	28	30	38	46	57	79



D1 TYPE

DAESAN light weight, portable lever hoist increases a worker's efficiency in pulling, lifting, lowering moving and skidding objects in industrial maintenance construction and utility company applications. Minimal effort is required to move tons. Excellent for stretching cable and fencing positioning machinery and building components.

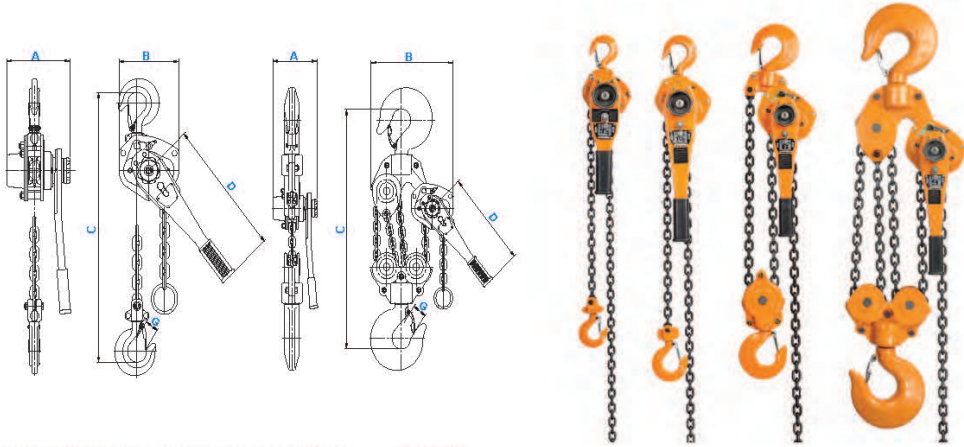

Operation (D1 type) : Two levers and a knob control the operation of DAESAN lever hoist.

The lifting "Lock" lever can only be engaged when the hoist chain is slack (not under load). The grip ring is then pulled to engage the load sheave. Choose "Up" or "Down" position on the handle to raise or lower the load.

Gears : Six tooth pinion gear and four pocket load sheave makes operation easy. Gears are permanently lubricated

Mechanical load brake : Brake can hold a full capacity load stationary in any position. Load is not transferred back to handle during handle advancement.

Hooks : All hooks are drop forged, heat treated steel with spring type latches. Both hook rotates 360° for easy rigging.

Load Chain : Electric welded G80 alloy steel chain is heat treated for wear resistance and strength. Accurately and uniformly sized to seat properly in load sheaves.

D1 TYPE

MODEL NO :	D08	D15	D20	D30	D60	D90	D120
Capacity (SWL) (ton)	0.75	1.5	2	3	6	9	12
Chain fall (no.)	1	1	1	1	2	3	4
Standard lift (m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Load chain dia (mm)	6.3 x 19.1	7.1 x 21.0	7.1 x 21.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0	9.0 x 27.0
Net weight (kg)	7	10	10.5	17	28	56	73
Pulling efforts (kg)	16	18	24	33	35	37	39
A (Dimension) (mm)	147	163	163	192	192	192	192
B	147	147	147	181	248	366	366
C	295	325	350	430	590	700	810
D	260	370	370	370	370	370	370
G	26	33	38	42	46	45	52

TROLLEY


DAESAN plain and geared trolleys are light and easy to adapt to a wide range of beams. The trolley wheels include lifetime ball bearings for maintenance free operation.

Bearings : Shielded, lifetime lubricated, single row ball bearings.

Wheels : Crown tread allows operation on tapered or flat flange beams with increased durability.

Suspension Lug : Pivot mounted suspension shaft designed to equally distribute the load to all wheels.

Hand Chain Box : Equipped from 20ton or above capacity gear trolley for better protection.

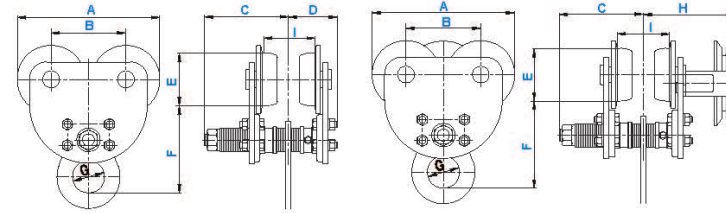


DP,DG TYPE

MODEL NO :	DP(Plain trolley)	DP05	DP1	DP2	DP3	DP5	DP10	N/A	N/A	N/A	N/A
	DG(Geared trolley)	N/A	DG1	DG2	DG3	DG5	DG10	DG15	DG20	DG30	DG40
Capacity (ton)		0.5	1	2	3	5	10	15	20	30	40
Hand chain operation length (m)		N/A	2.5	3	3	3	3.5	3.5	3.5	3.5	3.5
Min curve radius (mm)		1000	1300	1500	2000	2500	2600	3000	N/A	N/A	N/A
A (Dimension) (mm)		174	233	271	312	352	362	505	1131	1312	1312
B		90	122	142	163	183	183	255	712	776	776
C		142.5	142.5	160	168.5	184.5	249	211	291.5	302	302
D		76	76	93	100.5	115	126	N/A	N/A	N/A	N/A
E		55	80	100	113	125	125	254	150	154	154
F		1295	128	165	190	230	253.5	337.5	434	457.5	457.5
G		45	45	60	67	77	70	80	122	122	122
H		N/A	164	176	183	198.5	199.5	283	291.5	302	302
I		75-125	75-125	100-150	100-150	125-175	125-200	175-200	175-200	175-200	175-200
Net weight DP TYPE (Standard) (kg)		6	10	18.5	29	45	68	N/A	N/A	N/A	N/A
Net weight DG TYPE (Standard) (kg)		N/A	14	23	35	50	78	210	320	450	500

* (I : applied I-beam width)

* C,D,H figures are for minimum beam width. Figures will be changed accordingly when applied beam width increases.

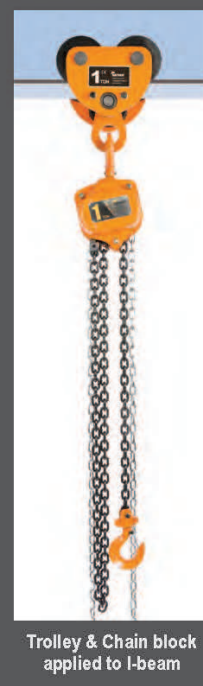

Trolley & Chain block applied to I-beam



PLAIN TROLLEY(DP)

GEARED TROLLEY(DG)



Ex -Proof Manual

CHAIN HOIST [1,2,3,5,10TON] PLAIN & GEARED TROLLEYS[1,2,3,5,10]

EXPLOSION PROTECTION & SPARK RESISTANCE

Designed for explosive environments with spark-resistant, full bronze suspension and load hooks; stainless steel hand chain and electroless nickel plated load chain ; and bronze wheels for trolley with safety drop stop and rubber bumper

CORROSION RESISTANT

Enclosed robust electroless nickel plated housing protects internal components, even in the toughest conditions.

*ATEX marking :

EX II 2 GD C IIC T4 T + 135 °C

*Suitable for gas & dust hazardous areas :
zone 1&2, zone 21&22

*Stainless steel Load chain(SUS316L)

*Stainless steel hand chain (SUS304)

*Electroless nickel plated load chain

*Bronze wheel

Option



Hoist body weather cover



Stainless steel frame canvas chain box




Overload protection device

*This option is available for all chain blocks and spark resistant chain hoists.
* Chain box types: stainless steel frame canvas chain box and steel frame canvas chain box.



- Spark Resistant Chain Hoist

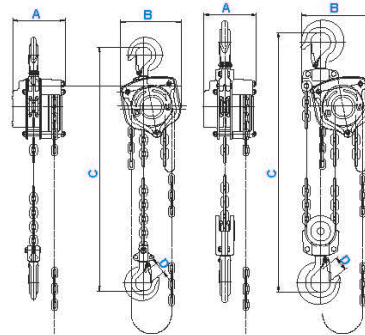

EX DSN TYPE

MODEL NO. - EX DSN	1	2	3	5	10
Capacity (Nickel plated load chain) (ton)	1	2	3	5	10
Hand chain force (kg)	33	34	35	39	41
Hand chain operation length (m)	2.5	3	3	3	3.5
Number of chain falls (no.)	1	1	2	2	4
Load chain size (mm)	6.3 x 19.1	7.9 x 23.0	7.1 x 21.0	9.0 x 27.0	9.0 x 27.0
Min headroom (C) (mm)	330	380	480	620	820
A (Dimension) (mm)	147	184	147	185	185
B	145	187	206	258	367
D	30	38	42	45	53
Net weight with standard lift (kg)	12	22	23	41	95
Net weight per m additional lift (kg)	1.36	1.86	2.7	4.02	7.54

*In case of applying stainless steel load chain, it is recommended to use 60% of rated load.

*The above specification is subject to change for stainless steel load chain application.



- Spark Resistant plain & geared traveling trolley

EX DP,DG TYPE


MODEL NO.	EX DP	1	2	3	5	10
	EX DG	1	2	3	5	10
Capacity (ton)		1	2	3	5	10
Hand chain force (kg)		10	16	20	20	19
Hand chain operation length (m)		2.5	3	3	3	3.5
Flange width (mm)		75 - 125	100 - 150	100 - 150	125 - 175	125 - 200
Min curve radius (mm)		1300	1500	2000	2500	2600
A (Dimension) (mm)		399	439	480	519	536
B		122	142	163	183	183
C		221.5	253	289.5	300.5	376
D		142.5	160	169	185.5	249
E		79	93	100.5	116	127
G		80	100	113	125	125
I		49	63	78.5	97.5	106
K		25	32	38	50	70
L		305.5	336	351.5	383	448.5
M		22	32	40	45	60
Net weight EXDP TYPE (Standard) (kg)		15	25	38	48	68
Net weight EXDG TYPE (Standard) (kg)		18	28	40	58	79

*Explosion protected version with spark resistant coating



Corrosion protection (Basic/Medium)

EXDP & EXDG-trolleys have outstanding corrosion protection. All steel parts are electroless nickel plated. This is a must in wet rooms and in very aggressive environment. Larger flange width are optional. Wheels fit flat and also tapered flanges!

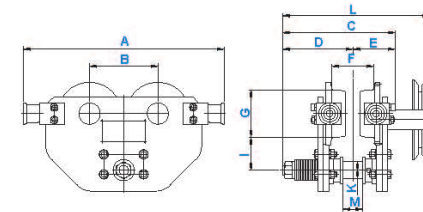

WIRE ROPE WINCH





DAESAN wire rope winch is manual winch used with steel wire rope.

- They can be used to lift, pull and position loads over great distances depending on the wire rope length.
- They are suitable for use in numerous configurations and are the ideal solution for use in professional applications.
- They are operated by a simple lever.
- Low weight-quick installation.
- No limitation in terms of cable length.
- Manageable, light-weight, robust, powerful.
- Increase load capacity with deflection sheaves.

DW TYPE

MODEL NO :	DW15	DW35
Capacity(SWL)	(ton) 1.6	3.2
Wire rope dia.	(mm) IWRC 11.6	IWRC 16.0
Casing of material	SPC	AL casting
Transmission speed	(m/min) 3	3
Pulling capacity	(ton) 2.5	5
Max. test to	(ton) 3	6
Breaking strength of wire	(ton) 9.68	17.2
Safety device	Safety hooks	Safety pins
External dimension(W x L x H)	(cm) 62 x 30 x 15	72 x 32 x 14
Length of handle	(mm) 1050	1210
Net weight without wire	(kg) 22	32
A (Dimension)	(mm) 556	675
B	235	228
C	350	343
D	147	148
E	43	28.5

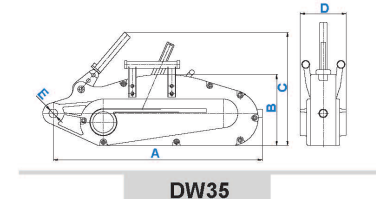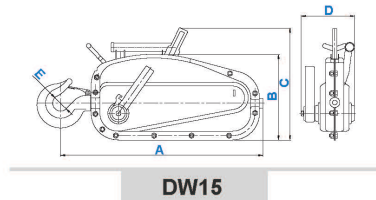

Lift Your Confidence

DAESAN brand is renowned around the world with the expertise of material handling. Where you require lifting solutions, our lifting equipment specialist will provide you with all necessary information or inform about where to find the nearest expert.

